


Natural Board

The rigidity of gray cardboard makes it easy to shape and fold, making it an economical and user-friendly option for packaging processes. Widely used in various packaging applications, our product is 100% recyclable.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m ²	mm	mNm	mNm
585	0.8	46	24
725	1.0	73	36
865	1.2	99	75
1100	1.5	146	82
1310	1.8	197	143
1475	2.0	321	170
1785	2.2	385	228
1850	2.5	522	330
2060	2.8	585	441
2225	3.0	687	569

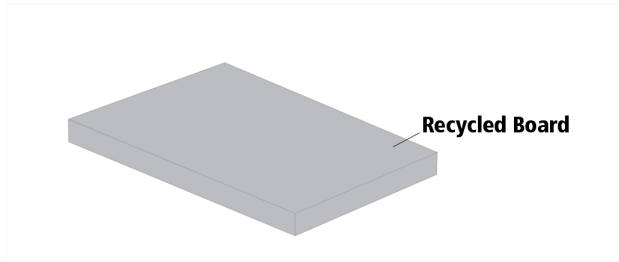

Test	Tolerance	Test metod
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	%±5	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	%±5	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

Applications

> Rigid box lamination, luxury packaging, lid lamination, textiles, stationery, corrugated cardboard, footwear, cosmetics, and the packaging industry offer unlimited usage possibilities.

Servises

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The minimum 350 x 400mm
- > The maximum 1500 x 1800 mm

Applicable Printing

- > Pattern printing
- > Digital Printing

Description

- > Considering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



ISO 9001:2015



ISO 14001:2015



ISO 22000:2005

