
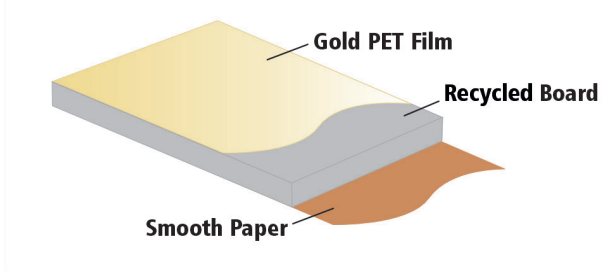


Lux Gold Board

One side is laminated with Gold metallized PET film and the other side is laminated with Liner paper. The outer layer prevents oil and water absorption, making the product resistant to moisture. The film surface does not develop unwanted wrinkles in hot and cold environments. It offers the highest quality in terms of rigidity and flatness.

| Grammage | Thickness | MD Stiffness | CD Stiffness |
|-------------------|-----------|--------------|--------------|
| ISO 536 | ISO 534 | ISO 5628 | ISO 5628 |
| gr/m ² | mm | mNm | mNm |
| 675 | 0.8 | 110 | 56 |
| 730 | 1.0 | 141 | 75 |
| 870 | 1.2 | 184 | 92 |
| 1095 | 1.5 | 300 | 162 |
| 1305 | 1.8 | 319 | 238 |
| 1375 | 2.0 | 546 | 315 |
| 1445 | 2.2 | 605 | 440 |
| 1725 | 2.5 | 686 | 528 |
| 1870 | 2.8 | 840 | 670 |
| 2100 | 3.0 | 982 | 783 |

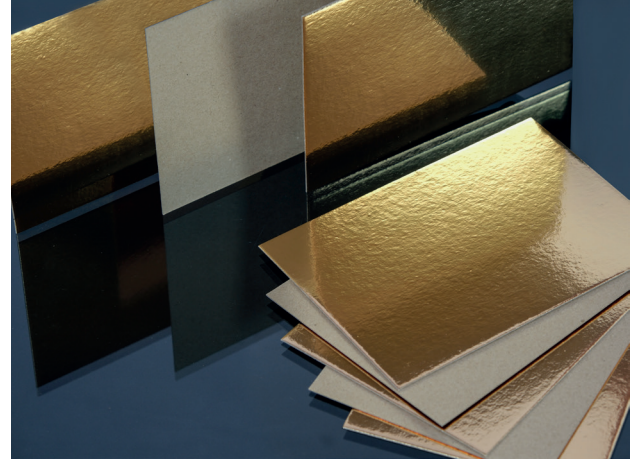

| Test | Tolerance | Test metod |
|---------------|---------------------|------------|
| Density | ± 1,43 | Türkoğlu |
| Humidity | 9.0% abs. %±5 | ISO 287 |
| Thickness | %±5 | ISO 534 |
| Size | ±0.5mm | Türkoğlu |
| Grammage | %±5 | ISO 536 |
| Recyclability | 1.00 ~ 3.00mm. % 97 | FSC |

Applications

> Extra-strong rigid solid board, perfect for Food Packaging, Pastry, Trays, Luxury Packaging, caterings, Bakeries and other commercial uses, such as Christmas and holiday celebrations, bakery sales, and more.

Services

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The minimum 350 x 400mm
- > The maximum 1500 x 1800 mm

Applicable Printing

- > pattern printing
- > Digital printing

Description

- > considering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



TR-34-K-124589



ISO 9001:2015



ISO 2200:2005
ISO 14001:2015

