
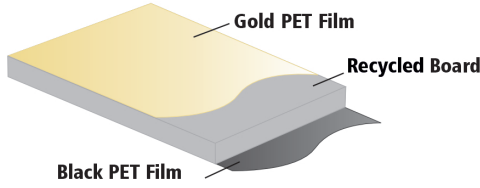


## 1s Gold 1s Black Pet Board

One side is coated with Gold metallized PET and other side is covered with Black metallized PET film. The outer layer prevents oil and water absorption, making the product resistant to moisture. It has excellent quality in terms of rigidity and smoothness. It is commonly used in party decorations, as well as in the bakery and pastry industries.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m <sup>2</sup>	mm	mNm	mNm
595	0.8	90	55
635	1.0	135	70
775	1.2	142	84
1020	1.5	209	137
1300	1.8	250	141
1405	2.0	451	256
1515	2.2	507	358
1650	2.5	589	447
1860	2.8	754	531
1960	3.0	835	689

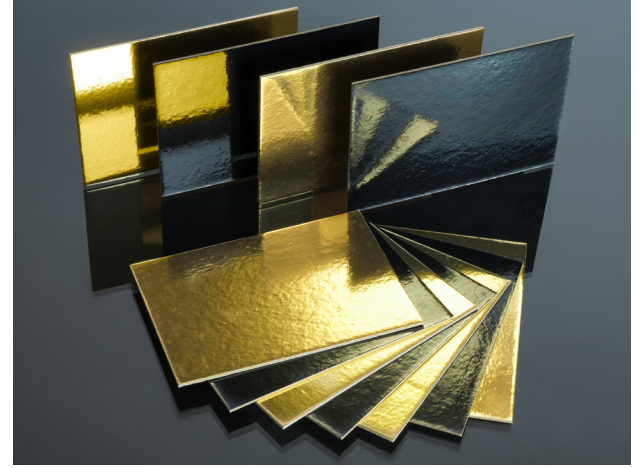

Test	Tolerance	Test metod
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	%±5	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	%±5	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

### Applications

- > Extra-strong rigid solid cardboard for food packaging, pastry making, trays, luxury packaging, birthday parties, bakeries, and other commercial uses.

### Services

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

### Size

- > The minimum 350 x 400mm
- > The maximum 1500 x 1800 mm

### Applicable Printing

- > pattern printing
- > Digital printing
- > flexograph

### Description

- > considering to variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula  $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$ .
- > For detailed inquiries and technical information, please contact our team.

### Certificates



TR-34-K-124589



ISO 9001:2015



ISO 2200:2005  
ISO 14001:2015

