
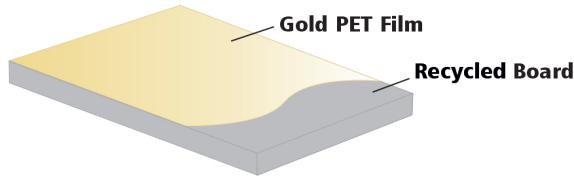


Is Gold PET Board

One side is laminated whit Gold metallized PET film and other side is natural greyboard. The outer layer prevents oil and water absorption, making the product resistant to moisture. It has good quality in terms of rigidity and flatness. It is an economical and environmentally friendly product.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m ²	mm	mNm	mNm
595	0.8	56	38
615	1.0	83	49
825	1.2	126	62
1070	1.5	210	112
1280	1.8	288	156
1405	2.0	324	201
1525	2.2	475	265
1680	2.5	644	383
1930	2.8	721	500
1960	3.0	774	674

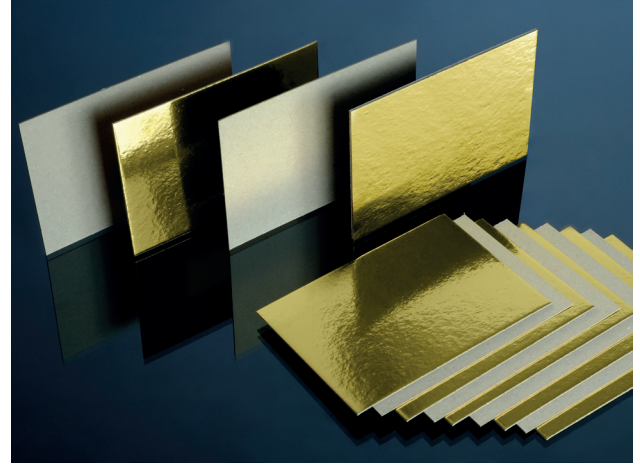

Test	Tolerance	Test metod
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	%±5	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	%±5	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

Applications

- > Extra-strong rigid solid board, perfect for Food Packaging, Pastry, Trays, Luxury Packaging, caterings, Bakeries, and other commercial uses, such as Christmas and holiday celebrations, bakery sales, and more.

Servises

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The smallest size 350 x 400mm
- > The largest size 1500 x 1800 mm

Applicable Printing

- > pattern printig
- > Flexograph
- > Digital printing

Description

- > cosidering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



TR-34-K-124589



ISO 9001:2015



ISO 2200:2005
ISO 14001:2015



FSC® C130154