
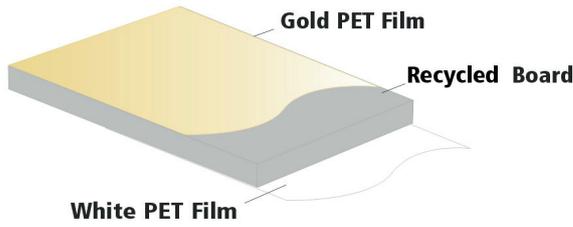


1s Gold PET 1s White PET Board

One side is laminated with Gold metallized PET film, and other is laminated with White PET film. The intermediate layer is made from recycled cardboard. The outer surface prevents oil and water absorption, making the product resistant to moisture. It has good quality in terms of stiffness and flatness.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m ²	mm	mNm	mNm
675	0.8	108	60
730	1.0	138	74
850	1.2	182	87
1095	1.5	267	156
1305	1.8	308	230
1375	2.0	528	305
1445	2.2	586	426
1725	2.5	668	510
1870	2.8	814	647
2100	3.0	896	714

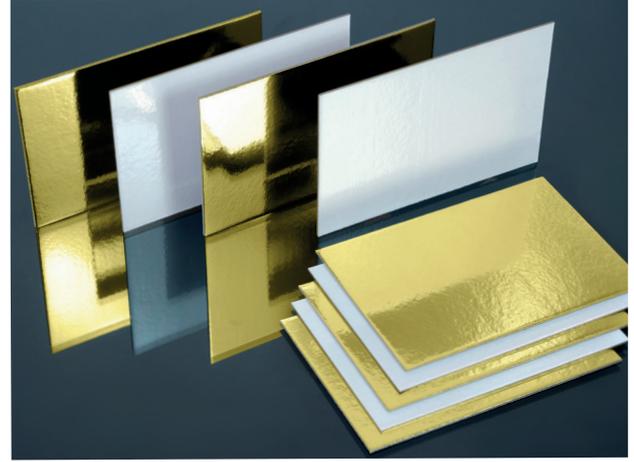

Test	Tolerance	Test metod
Whiteness	9.0% abs. %±5	ISO 287
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	±0.5 %	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	±0.5 %	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

Applications

> Extra-strong, rigid solid board, perfect for food packaging, pastry, trays, luxury packaging, weddings, birthday parties, bakeries, and other commercial uses, as well as Christmas and holiday celebrations, bakery sales, and much more.

Services

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The minimum 350 x 400mm
- > The maximum 1500 x 1800 mm

Applicable Printing

- > Pattern printing
- > Digital Printing

Description

- > considering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



TR-34-K-124589



ISO 9001:2015



ISO 2200:2005
ISO 14001:2015

