


## Is White Board

Solid cardboard with one side white paper and other side smooth liner paper. In addition, having a smooth surface is an indispensable option for roughing operations. With these features, it is the ideal board for rigid box packaging.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m <sup>2</sup>	mm	mNm	mNm
630	0.8	58	33
795	1.0	129	53
935	1.2	176	81
1220	1.5	243	139
1380	1.8	306	177
1520	2.0	371	219
1660	2.2	430	262
1895	2.5	628	454
2130	2.8	660	484
2270	3.0	703	583

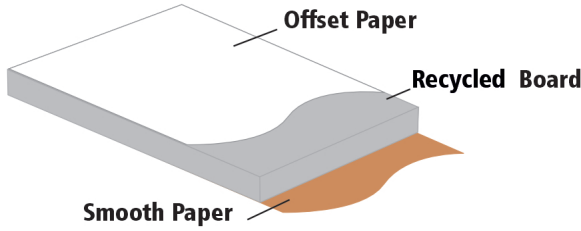

Test	Tolerance	Test metod
Whiteness	9.0% abs. %±5	ISO 287
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	%±5	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	%±5	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

### Applications

- It offers unlimited usage possibilities, including rigid box laminating, luxury packaging, textiles, stationery, footwear, and cosmetics.

### Servises

- Embossing
- Die Cutting
- Guillotine Cutting
- Strapping & Packaging
- Labeling & Barcoding

### Size

- The minimum 350 x 400mm
- The maximum 2100 x 2200 mm

### Applicable Printing

- Pattern printing
- Flexsograph
- Digital Printing

### Description

- considering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- The stiffness Geometric Mean has been calculated using the formula  $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$ .
- For detailed inquiries and technical information, please contact our team.

### Certificates



ISO 9001:2015



ISO 14001:2015



ISO 2200:2005

