
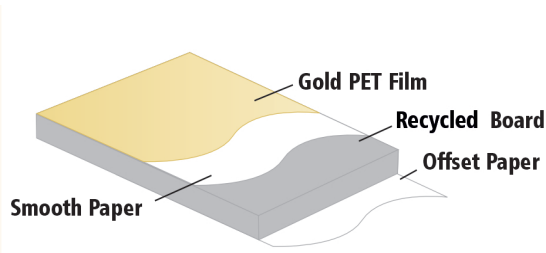


1s Gold Pet 1s White board

This cardboard features high-quality rigidity and smoothness. The Metalized Gold PET and Offset PET film coatings enhance the surface of the cardboard, providing a more elegant appearance. In both hot and cold environments, the film coating prevents undesirable creasing. It is particularly preferred in the Party Decorations, Pastry, and Bakery sectors.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m ²	mm	mNm	mNm
675	0.8	108	60
730	1.0	138	74
850	1.2	182	87
1095	1.5	267	156
1305	1.8	308	230
1375	2.0	528	305
1445	2.2	586	426
1725	2.5	668	510
1870	2.8	814	647
2100	3.0	896	714

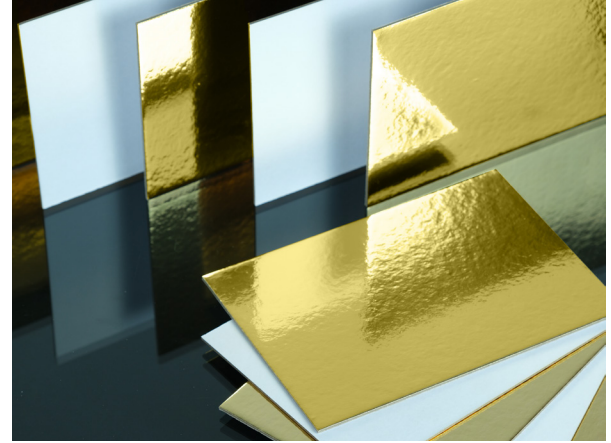

Test	Tolerance	Test metod
Whitness	9.0% abs. %±5	ISO 287
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	± 0.5 mm Plate	ISO 534
Size	Plate ±0.5mm	Türkoğlu
Grammage	±0.5 %	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

Applications

> Extra-strong, rigid solid board, perfect for food packaging, pastry, trays, luxury packaging, weddings, birthday parties, bakeries, and other commercial uses, as well as Christmas and holiday celebrations, bakery sales, and much more.

Services

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The smallest size 350 x 400mm
- > The largest size 1500 x 1800 mm

Applicable Printing

- > Serigraf
- > Dijital print

Description

- > Due to changes in raw materials, the values provided in the table may vary by ±7%.
- > The geometric mean stiffness value is provided and has been calculated using the formula: $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



TR-34-K-124589



ISO 9001:2015



ISO 2200:2005
ISO 14001:2015

